FINGERPRINT LOCK

INSTALLATION INSTRUCTIONS



Packing List

Open the product package. Check that the follwoing accessories are included.




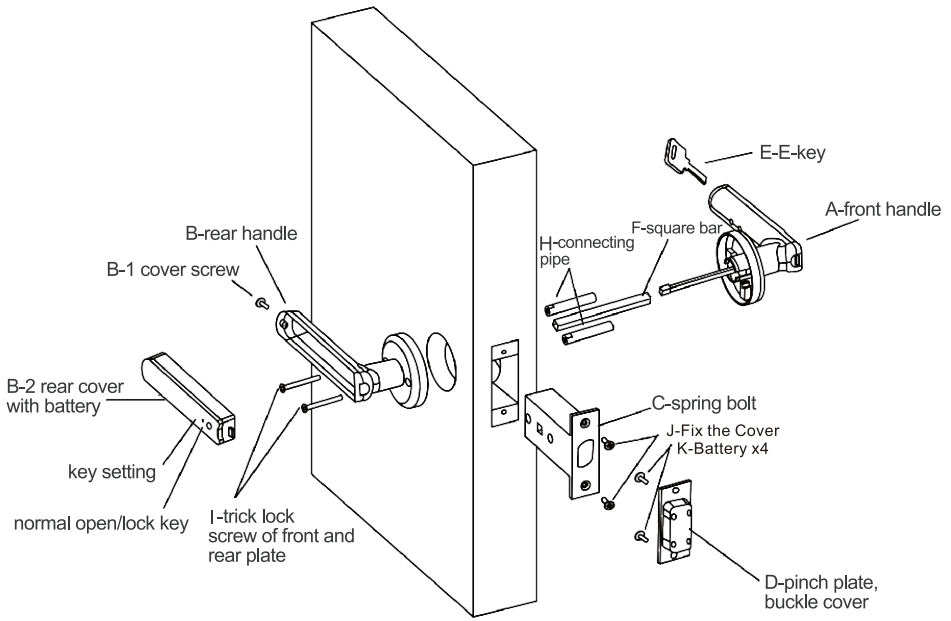


Diagram of Door Lock Installation


Installation Steps

STEP 1:



Pass the square along the wire

STEP 2:






Choose the screw of the corresponding length according to the thickness of the door and tighten the screws


STEP 3:





Open the battery cover to install the battery


STEP 4:






Install the deadbolt





1.Pay attention to the direction of the lock tongue when you installing



2. The hole position can be adjusted according to the door lock position

STEP 5:





Install and fix the door handle

STEP 6:






Connect door lock circuit board port


STEP 7:





Tighten the screws secur- ing the battery cover





After completing the above steps, the door lock installation is complete

Set Password

CAUTION:Any fingerprint can unlock it if no user is enrolled.


1.Add a Fingerprint User for the First Time

STEP 1:




Touch to wake up the password area

STEP 2:



Enter "1" +"#" and the indicator will blink blue light

STEP 3:



Press the sensor with any fingerprint


STEP 4:



Press the sensor five times with the finger you want to enroll


2.Add a Password User for the First Time

STEP 1:




Touch to wake up the password area

STEP 2:



Enter "1" +"#" and the indicator will blink blue light

STEP 3:



Press the registered administrator fingerprint

STEP 4:



Input a six-digit password and press "#" to confirm

STEP 5:



Repeat password input


3. Add Fingerprint User for the Second Time

STEP 1:




Touch to wake up the password area

STEP 2:




Enter "1 "+"#"and the indicator will blink blue light

STEP 3:



Press the registered administrator fingerprint


STEP 4:



Press the sensor 5 times rprint with the other finger you want to enroll


4.Add Password User for the Second Time

STEP 1:



Touch to wake up the password area

STEP 2:



Enter "1 "+"#"and the indicator will blink blue light

STEP 3:



Press the registered administrator fingerprint


STEP 4:



Enter the other six-digit rprint password and press "#" to confirm,and repeat the second time

Three Ways to Unlock

1.Fingerprint Unlock





Press the fingerprint sensor on the handle, the indicator light will turn green and emit a beep, unlocking is successful.


2.Pass word Unlock





Touch the wake-up password area, input the 6-digit password and press"#" to confirm, successful.

3.Key Unlock-Emergency Unlock







O ther S etti ngs

1.Two Ways to Reset and Delete All the Users

Method 1:


STEP 1:






Long press the small hole on the inside handle with a small screwdriver for 9 seconds

STEP 2:






When the indicator blinks red light, stop the operation, the reset is successful

Method 2:

STEP 1:





Enter "888 "+"#", and the indicator will blink red light

STEP 2:




Press the registered adminis- trator fingerprint, the reset is successful

2.Two Ways to Turn ON Normally-Open Mode


Method 1:

STEP 1:



Long press the button onthe inside handle for 1 second

STEP 2:



When the indicator light turns green,release the button

Method 2:


STEP 1:



Touch to wake up the password area


STEP 2:





Enter "28 "+"#", and theindicatror will blink purple light

STEP 3:



Press the registered adminis trator fingerprint

3. Four Ways to Turn OFF Normally-Open Mode

a. Repeat the above 2 methods to turn off the normally open mode

b. Press "#" to lock and turn off the normally open mode

c. Enter an enrolled fingerprint or password to lockupg

4.Emergency Unlock


Method 1:

STEP 1:



Plug the USB power cord into the connector

STEP 2:



Press the registered administrator fingerprint

STEP 3:



Unlocking is successful

Useful Tips

1. Keep at least one key out of the door for emergency.
2. When the battery is low, the indicator will blink red light. The rest power could only be used for about 50 times.
3. When the battery is out of power, you can unlock the door with key, or supply the lock with power through the micro-USB port and use fingerprint or password to unlock it.
4.Use alkaline batteries to prevent the damage by battery leakage. Batteries must be replaced every 2 years.

Product Parameters

1. Number of fingerprints: 50
2. Number of passwords: 100
3. Power supply:4 AAA 1.5V alkaline batteries

After-Sales Service

If you have any problem during installation or operation, please contact us.

Useful Tips:

1. Keep at least one key out of the door for emergency.
2.When the battery is low, the indicator will blink red light.The rest power conld only be used for about 50 times.
3. When the battery is out of power, you can unlock the door with key, or supply the lock with power through the micro-USB port and use fingerprint or password
4. Use alkaline batteries to prevent the damage by battery leakage. Batteries must be replaced every 2 years.

Q&A:

Q: The button doesn't respond and light doesn't light up?

A: Check the cable is it connect to the right way or it's loose, After this it's still can't work,normally it's the battery dead . It needs to change the batteries (4*1.5V AAA battery), or pull out the inner back cover and insert it again.

Q: Which model of the door can install the fingerprint door lock ?

A: There is no limit. If the door thickness more than 3.5cm-6.5cm then it can install.

Q: How to restore the factory settings ?

A: Long click the setting button 5s, the blue light will shinning and have the bee sound,After 5s will have the red light shinning and have a voice remainder"initial success" ,This means successful.

Q: What is the initial password if the fingerprint lock is restored to the factory setting?

A: Initial password is "123456"#

Q:How to do if the lock run out of the battery?

A: Use the power bank to connect the USB port to charge then use of use the key to open the door.

Q: How to do if you forget the password?

A: Use the fingerprint or key to unlocked the door and then restore the factory settings to reset the password.